

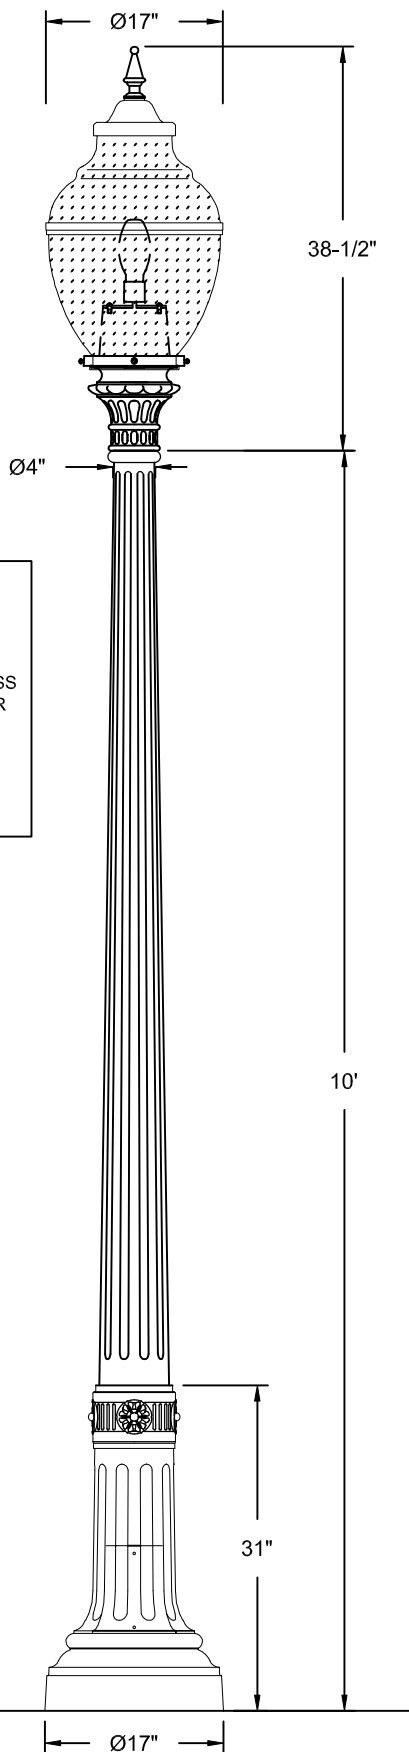
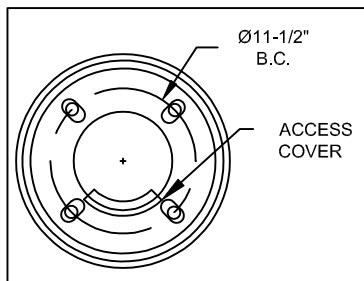
Please Note: Fabrication will not begin until this drawing is approved, signed, and returned to HCI

- APPROVED
- APPROVED AS NOTED
- REJECTED
- REVISE AND RESUBMIT

By _____

Date _____

Approved to order : Aug 31, 2021
N Splinter

Approval Drawing

F112-L-Q/P452-CC-10

Diffuser Type: External Prismatic Glass

Diffuser Fitter Material: Cast Aluminium

Hardware: Stainless steel

Light Distribution: IES Type 3

Driver: High power factor generator for QL lamp mounted on a removable plate. Quick disconnect wiring allows for easy ballast maintenance.

Wattage: 55W

Voltage: 120V

Socket: Special (provided with lamp)

Lamp: QL

Pole: Fluted cast aluminum pole.

Base Cover: One piece cast aluminum base welded to pole.

Anchor Bolts: Four 3/4\" by 24\" anchor bolts and one template supplied by HCI.

Bolt Circle: Ø11-1/2\"

Finish: Electrostatically applied, thermoset polyester powder-coat finish.

Colour: PF280-G5

Sales: KIM

Designer: HOWARD

Date: NOV.13.2020

Drawing No: 15117-V10

Model: F112-L-Q-EGL-55QL-120V-BL3-FA
+P452-1-CC-10-Brushed-Grey-PF280-G5

Project: Queen's University (Qty: 20)

Rep: WESCO ELECTRIC, ON.

Please Note: Fabrication will not begin until this drawing is approved, signed, and returned to HCI



1280 Fewster Drive, Mississauga, Ontario, Canada L4W 1A4
Tel: (905) 238-2648 Fax: (905) 238-9060
Toll Free Canada & USA 1-800-267-3175
E: sales@hclighting.com WEB: www.hclighting.com